


**ecocirc PREMIUM 32-4/180**

**Technical data**

Company name  
Contact  
Phone number  
e-mail address

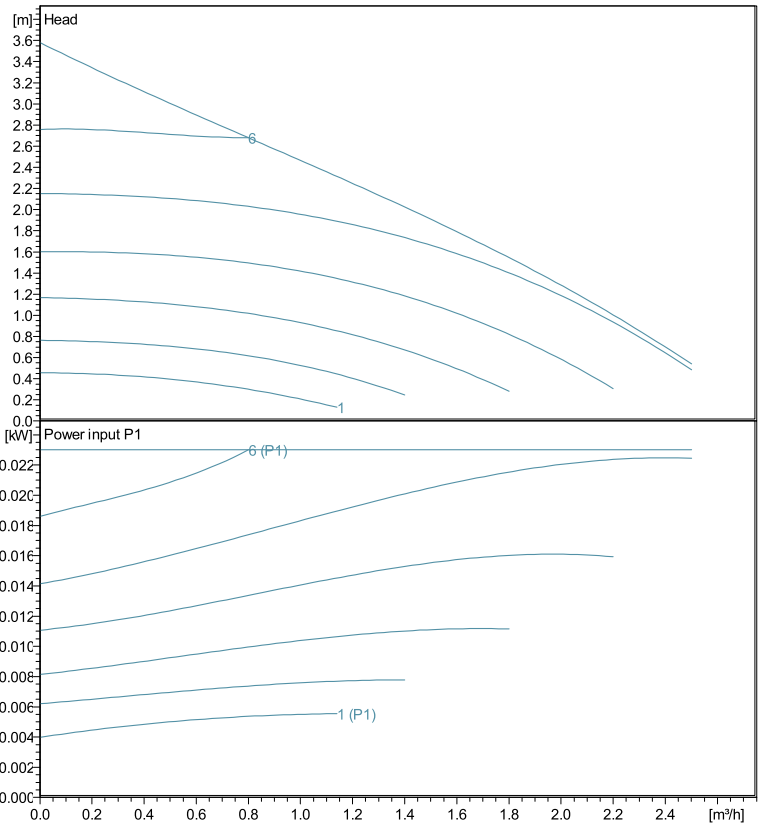

Performance according to ISO 9906:2012 – Grade 3B

Power datas referred to:  
Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

**Operating Data Specification**

Flow	0 m³/h
Head	0 m
Power input	

**Pump data**

Pressure rating	PN 6
Weight	2.4 kg
* No condensing, no freezing	

**Materials**

Pump body	Cast iron cataphoretically coated
Rotor assembly group	Stainless steel / Composite material / Carbon
Bearing	Ceramics
Gaskets	EPDM
Motor housing	Aluminium
Screw ring	Aluminium
Plug	Polyamide

**Motor data**

Energy efficiency class	A		
Max Power	0.023 kW	max Strom	0.28 A
Rated voltage	230 V	Frequency	50
Insulation class	F	Protection	IP 44

**Dimensions mm**

D	Rp 1 1/4"
DN	32
F	G 2"
H	180
H1	90

