

Qty. Description

1 UPS 25-55 N 180



Note! Product picture may differ from actual product

Product No.: [95906408](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump has 3-step speed selector.

The pump is characterized by:

- * Ceramic shaft and radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can and bearing plate.
- * Corrosion-resistant impeller, Composite, PES/PP.
- * Stainless steel pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Pumped liquid: Water
 Liquid temperature range: -25 .. 110 °C
 Selected liquid temperature: 60 °C
 Density: 983.2 kg/m³

Technical:

TF class: 110
 Approvals on nameplate: CE,EAC,WEEE

Materials:

Pump housing: Stainless steel
 DIN W.-Nr. 1.4301
 AISI 304
 Impeller: Composite, PES/PP

Installation:

Amb. max at 80 dgr C liquid: 40 °C
 Maximum operating pressure: 10 bar
 Pipe connection: G 1 1/2
 Pressure rating: PN 10
 Port-to-port length: 180 mm

Electrical data:

Power input in speed 1: 65 W
 Power input in speed 2: 80 W
 Max. power input: 85 W
 Mains frequency: 50 Hz



Company name:

Created by:



Phone:

Date:

17/04/2020

Qty.	Description
	<p data-bbox="199 340 678 548">Rated voltage: 1 x 230 V Current in speed 1: 0.3 A Current in speed 2: 0.36 A Current in speed 3: 0.38 A Capacitor size - run: 2.5 µF Enclosure class (IEC 34-5): X2D Insulation class (IEC 85): F</p> <p data-bbox="199 577 295 607">Others:</p> <p data-bbox="199 609 678 784">Net weight: 4.7 kg Gross weight: 5.4 kg Shipping volume: 0.008 m³ Finnish LVI No.: 4615613 Country of origin: RS Custom tariff no.: 84137030</p>

Description	Value
General information:	
Product name:	UPS 25-55 N 180
Product No:	95906408
EAN number:	5700310298702
	5700310298702
Price:	545,00 EUR
Technical:	
Speed no:	3
Head max:	55 dm
TF class:	110
Approvals on nameplate:	CE,EAC,WEEE
Materials:	
Pump housing:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	Composite, PES/PP
Installation:	
Amb. max at 80 dgr C liquid:	40 °C
Maximum operating pressure:	10 bar
Pipe connection:	G 1 1/2
Pressure rating:	PN 10
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m ³
Electrical data:	
Power input in speed 1:	65 W
Power input in speed 2:	80 W
Max. power input:	85 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.3 A
Current in speed 2:	0.36 A
Current in speed 3:	0.38 A
Capacitor size - run:	2.5 µF
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Motor protec:	CONTACT
Thermal protec:	internal
Controls:	
Pos term box:	9H
Others:	
Net weight:	4.7 kg
Gross weight:	5.4 kg
Shipping volume:	0.008 m ³
Finnish LVI No.:	4615613
Country of origin:	RS
Custom tariff no.:	84137030

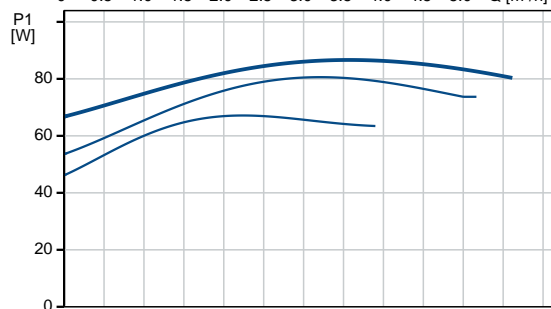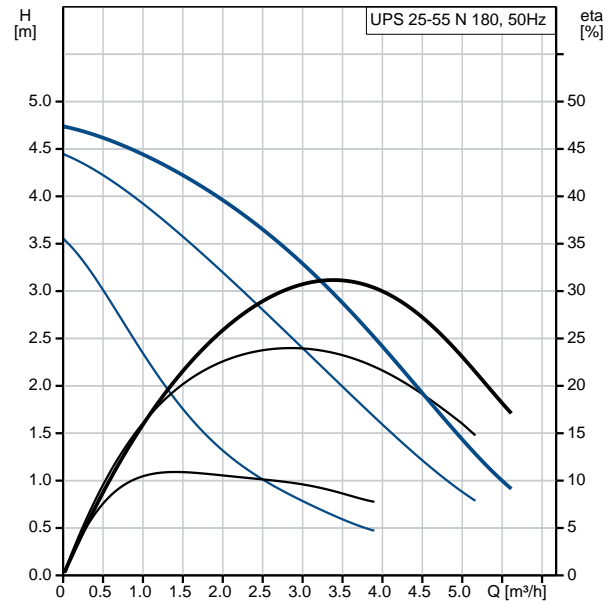

G 1 1/2

