

Customer



Technical data

Submersible drainage pump Drain TMW 32/11

Project name

Project ID
Installation location
Customer pos.no

Date 2020-04-09

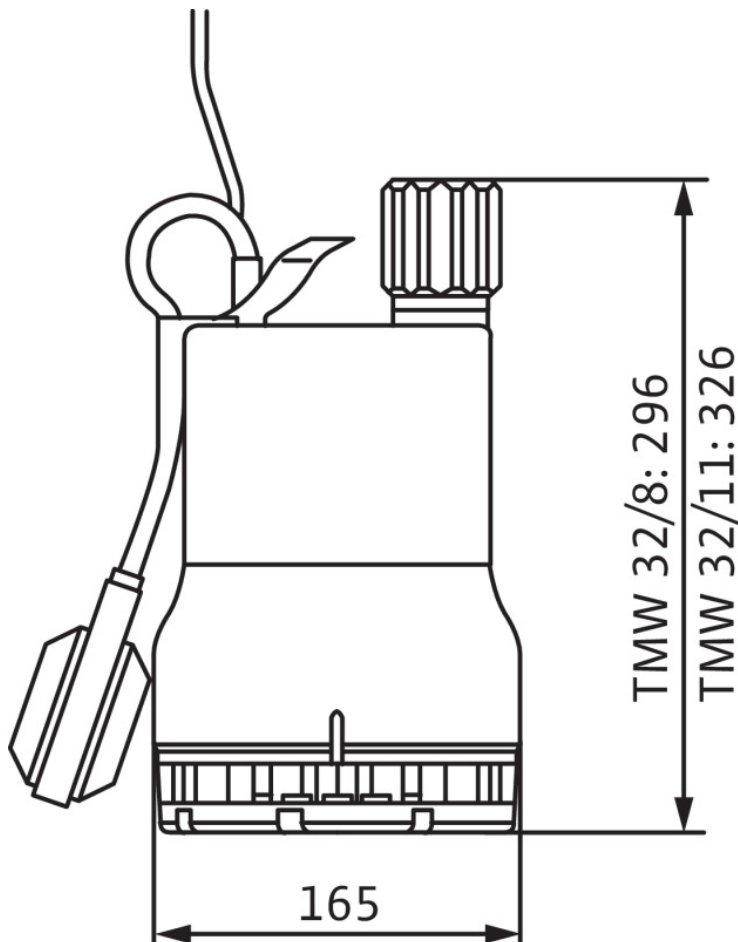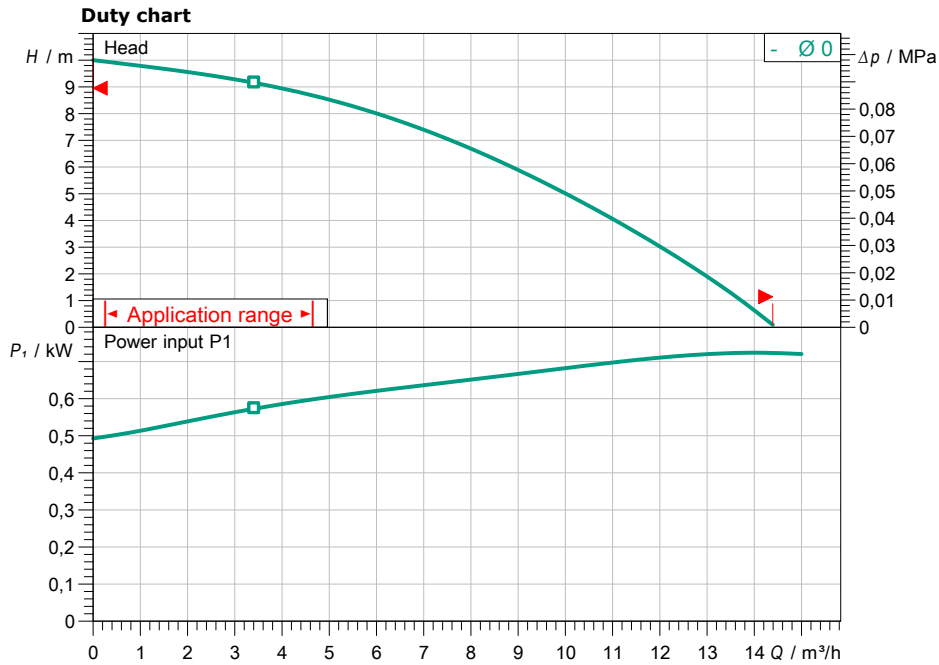

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20,00 °C
Density	998,30 kg/m ³
Kin. viscosity	1,00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Power input P1	
Total efficiency	

Product data

Submersible drainage pump	
Drain TMW 32/11	
Max. operating pressure	0,2 MPa
Fluid temperature	3 °C ... + 35 °C
Maximum submergence depth	1 m
Free ball passage	10 mm

Motordata per Motor/Pump

Type of motor	Submersible motor acc. I
Mains connection	1~ 230 V / 50 Hz
Permitted voltage tolerance	±10 %
Nominal speed	2900 1/min
Rated power P2	0,55 kW
Power input P1	0,75 kW
Rated current	3,60 A
Activation type	Direct online (DOL)
Degree of protection	IP68
Float switch	yes
Motor protection	
Insulation class	F
Operating mode (immersed)	S1
Operating mode (non-immersed)	S3-25%
Max. operating rate	50 1/h

Cable

Length of connecting cable	4 m
Cable type	H07RN-F
Cable cross section	3G1
Type of connecting cable	Non-detachable
Mains plug	

Fitting dimensions

Pipe connection on the suction side -,
Pipe connection on the pressure side G 1¼,

Materials

Pump housing	PP-GF30
Impeller	PPE/PS-GF20
Shaft	1.4104
Sealing on pump side	BQ1PFF
Sealing on motor side	NBR
Gasket material	NBR
Motor housing	1.4301

Information for order placements

Weight approx.	6,3 kg
Item number	4048414